

# SHARP

## SERVICE MANUAL/ SERVICE-ANLEITUNG/ MANUEL DE SERVICE

No. S9652CDC75HR/

# CD-C75H(BK) <sup>®</sup>

- In the interests of user-safety the set should be restored to its original condition and only parts identical to those specified be used.
- Im Interesse der Benutzer-Sicherheit sollte dieses Gerät wieder auf seinen ursprünglichen Zustand eingestellt und nur die vorgeschriebenen Teile verwendet werden.
- Dans l'intérêt de la sécurité de l'utilisateur, l'appareil devra être reconstitué dans sa condition première et seules des pièces identiques à celles spécifiées, doivent être utilisées.

This new model CD-C75H(BK)<sup>®</sup> has almost the same structure as the former model CD-C75H(BK) except for some outer parts, VIDEO/AUX OUT Circuit, and so only these parts are here described. When servicing the CD-C75H(BK)<sup>®</sup>, please refer to the accompanying service manual for CD-C75H(BK) (No. S4615CDC75HBK) as well as this service manual.

### DIFFERENCE BETWEEN CD-C75H(BK) AND CD-C75H(BK)<sup>®</sup>

REF. NO	PART NO. ★		DESCROPTION	CODE		
	CD-C75H(BK)	CD-C75H(BK) <sup>®</sup>				
<b>INTEGRATED CIRCUIT</b>						
IC681	_____	VHiBA4558F-1	J	Line Amp.,BA4558F	AD	
IC201	RH-iX0117AWZZ	Same as CD-C75H(BK)		System Microcomputer,μPD78045A (Serial No. 6060001-60902000)	BB	
IC201	_____	RH-iX0164AWZZ	J	System Microcomputer,μPD78045A (From Serial No. 61002001~)	BB	
<b>TRANSISTOR</b>						
Q681,682	_____	VSKTC3199GR-1	J	Digital, NPN, KTC3199 GR	AB	
Q699	_____	VSKRA107M//1	J	Digital, PNP, KRA107 M	AE	
<b>CAPACITORS</b>						
C681,682	_____	VCKYMN1HB331K	J	330pF, 50V	AA	
Q683,684	_____	RC-GZA225AF1H	J	2.2μF, 50V, Electrolytic	AB	
C685,686	_____	VCKYMN1HB181K	J	180 pF, 50V	AA	
C687,688	_____	VCCSMN1HL470J	J	47pF, 50V	AA	
C689,690	_____	RC-GZA225AF1H	J	2.2μF, 50V, Electrolytic	AB	
C696,697	_____	VCTYMN1EF223Z	J	0.022μF, 25V	AA	
C699	_____	RC-GZA475AF1H	J	4.7μF, 50V, Electrolytic	AB	
<b>RESISTORS</b>						
R249	_____	VRD-ST2CD102J	J	1kohm, 1/6W	AA	
R681,682	_____	VRD-MN2BD102J	J	1kohm, 1/8W	AA	
R683,684	_____	VRD-MN2BD104J	J	100kohm, 1/8W	AA	
R685,686	_____	VRD-MN2BD123J	J	12kohms, 1/8W	AA	
R687,688	_____	VRD-MN2BD153J	J	15kohms, 1/8W	AA	
R689,690	_____	VRD-MN2BD104J	J	100kohm, 1/8W	AA	
R691	_____	VRD-ST2CD472J	J	4.7kohms, 1/6W	AA	
R692	_____	VRD-MN2BD472J	J	4.7kohms, 1/8W	AA	
R699	_____	VRD-MN2BD473J	J	47kohms, 1/8W	AA	
R953,954	_____	VRD-MN2BD102J	J	1kohm, 1/8W	AA	
<b>OTHER CIRCUITRY PARTS</b>						
J681	QS5CJ0205AWZZ	J	QS5CJ0401AWZZ	J	Jack, VIDEO/AUX	AH
<b>CABINET PARTS</b>						
212	GiTAR0120AWSA	J	GiTAR0167AWSA	J	Back Board	AW
<b>ACCESSORIES/PACKING PARTS</b>						
	SPAKC0345AWZZ	J	SPAKC0438AWZZ	J	Packing Case	
	_____		TCAUH0030AWZZ	J	Caution Tag	

★ MARK: SPARE PARTS-DELIVERY SECTION



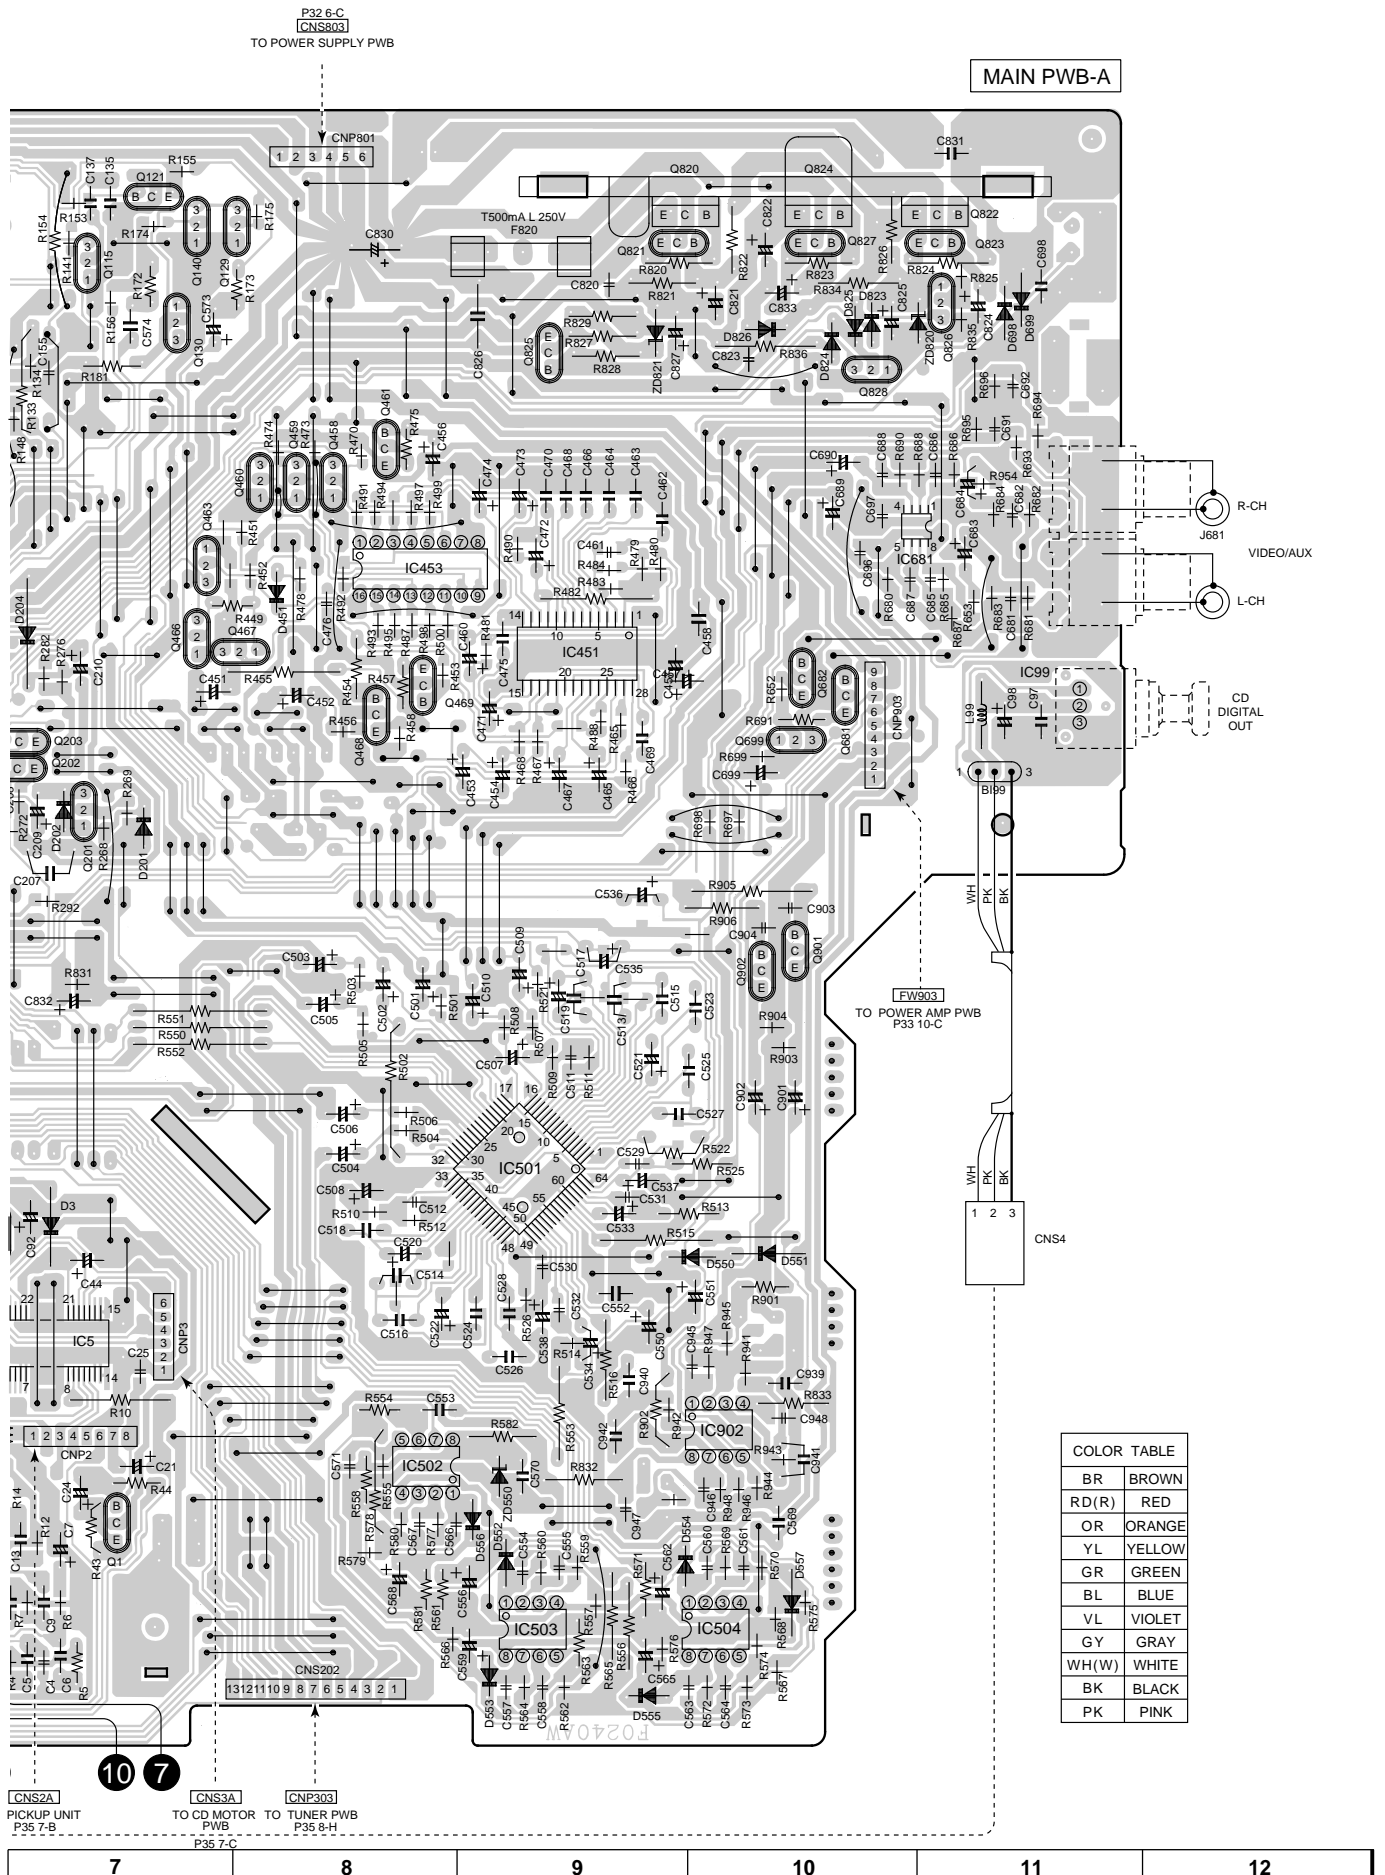


Figure 3 WIRING SIDE OF P.W.BOARD (1/2)

